




**ATLAS EXPORT DEPARTMENT**  
export@atlas.com.pl

**Foreign Sales Manager (UK)**  
Barbara Kończewska  
Mob. +48 667 771 730  
bkonczewska@atlas.com.pl



BUILDING TOMORROW

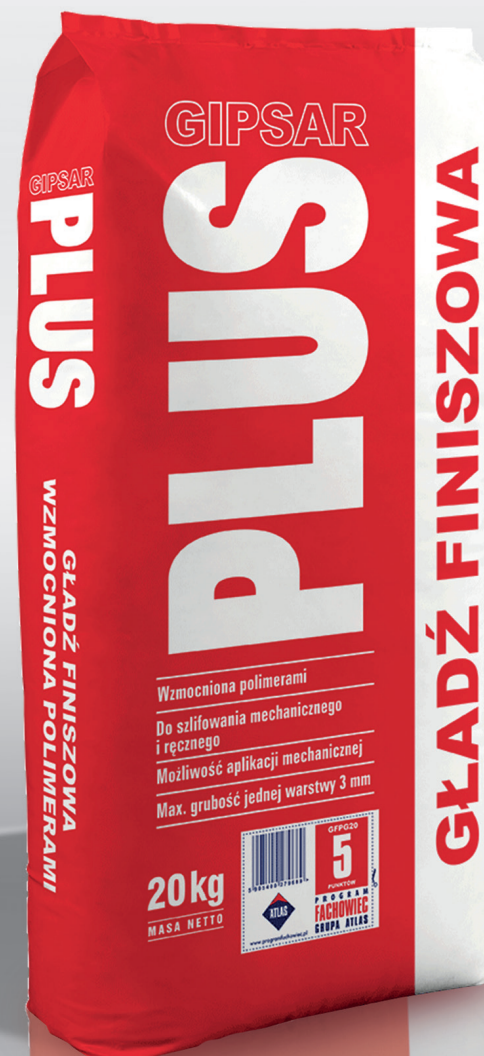

**PLUS**  
GIPSAR

### GYPSUM TOP FINISH

- easy application
- extremely smooth
- perfect for decorative finishes

# STEP BY STEP APPLICATION GUIDE

**Before application:** make sure the substrate is dry, clean and stable.  
Go over the substrate with primer. Wait till dry.

## APPLICATION

**1.**

Add approx. 7,5 litres of clean water per 20 kg bag to mixing bucket.

**2.**

Add the plaster to water.  
Leave for 5 minutes.  
Mix until homogenous.

**3.**

Complete the first coat using stainless steel tools.  
If needed, apply second coat\* when the first is set not dry (after 1,5 to 3 hours depending on temperature and humidity).

**4.**

Once the plaster dries, remove small bumps with a sand paper (by hand or mechanically). Work until desired effect is obtained.

\* Remember! You can apply up to 3 mm in one layer so a single coat application is possible!




**MIX**



**APPLY**



**LEAVE TO DRY**



**SAND DOWN**

**Coverage per bag:** approx. 17 m<sup>2</sup> at 2 mm thickness

	ATLAS PLUS GIPSAR	Multi Finish*
<b>Mixing</b>	7,5 l of water/20 kg bag (trowel application)	11,5 l of water/25 kg bag
<b>Surface quality</b>	very smooth perfect for painting	smooth
<b>Patch repairs</b>	possible- filling scratches, holes, total thickness: up to 5 mm	difficult to correct once completely dry
<b>Shelf life</b>	12 months	4 months
<b>Total thickness</b>	5 mm	3 mm
<b>Smoothing/sanding</b>	hand and machine sanding dry sand paper or lubricated sponge trowel	smoothing with lubricated trowel
<b>Packaging</b>	20 kg, foil bag no dusting, waterproof	25 kg, paper bag
<b>Accreditation</b>	CE marked Conforms to EN 13279-1	CE marked Conforms to EN 13279-1

\* based on British Gypsum Thistle MultiFinish Installation Guidance and Product Data Sheet and internal tests

